


ACERBIS

FUEL TANK SUZUKI DR350 S'90/91 16 LT

SERBATTOIO SUZUKI DR350 S'90/91 16 LT

COD. 000003800 REV4

ACERBIS PARTS




A - (1 PCS)




B - (1 PCS)



C - (1 PCS)



D - (1 PCS)



P - (2 PCS)



E - (1 PCS)



F - (2 PCS)



G - (2 PCS)



H - (2 PCS)



I - (2 PCS)



L - (4 PCS)



M - (2 PCS)



N - (2 PCS)




O - (2 PCS)

WARNING

Durante il rimontaggio suggeriamo vivamente di utilizzare un grasso anti-grippante sulle viti che entrano negli inserti in metallo.

Highly suggest to use anti-seize/grease lubricant on all bolt threads going into the tank's metal inserts when reinstalling.


1

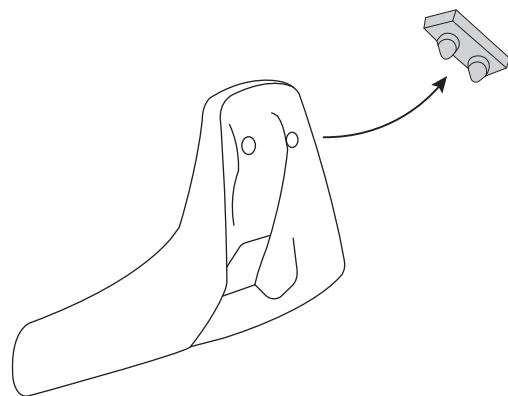

Remove the original seat and side panels. Remove from the seat the original gasket.

Smontare sella e fianchetti originali. Rimuovere dalla sella la guarnizione originale.

2

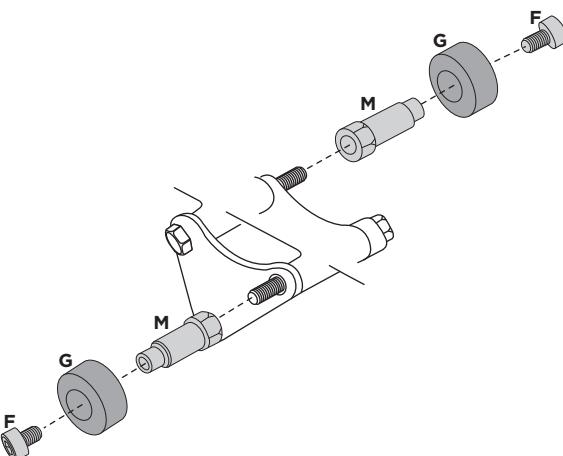

Take off the original sell locking nuts and tighten the bearings (M), with the grommets (G) and the screws (D).

Svitare i dadi autobloccanti originali dal telaio ed avvitare i supporti (M) con i gommini (G) e le viti (F).

WARNING!

It is EXTREMELY IMPORTANT that the fuel tank is properly installed. To ensure proper installation, it is STRONGLY RECOMMENDED that the tank is installed only by a qualified OEM licensed dealership mechanic. Improper installation could result in serious injuries or death.

If self-installed NOTE THE FOLLOWING: particular attention must be paid to excessive fuel line length and fuel line proximity to hot engine areas and pipes to prevent fire.

Clean tank interior thoroughly before installation. Install this fuel tank only in a well ventilated area, as gasoline fumes are extremely dangerous.

Do not start or operate the vehicle if there are any fuel leaks! Read all instructions first before beginning installation.

Acerbis recommends that installation must be done by a licensed mechanic and that only Acerbis' original parts are used during installation.

Acerbis makes no guarantees or representations, express or implied, regarding the fitment of its product for any particular purpose. Acerbis makes no guarantees or representations, express or implied, regarding the extent to which its products protect individuals or property from injury or death or damage.

EUROPE

ACERBIS ITALIA S.P.A.
VIA SERIO, 37
24021 ALBINO (BG)
ITALY

U.S.A.

ACERBIS U.S.A. INC.
MAIL P.O. BOX 2030
SUN VALLEY, ID 83353
SHIP 110 LINDAY CIRCLE
KETCHUM, ID 83340
U.S.A.

UNITED KINGDOM


ACERBIS U.K LTD
UNIT 4 DUNFERMLINE COURT,
KINGSTON, MILTON KEYNES
MK10 0BY
GREAT BRITAIN

ACERBIS


FUEL TANK SUZUKI DR350 S'90/91 16 LT

SERBATTOIO SUZUKI DR350 S'90/91 16 LT

COD. 000003800 REV4

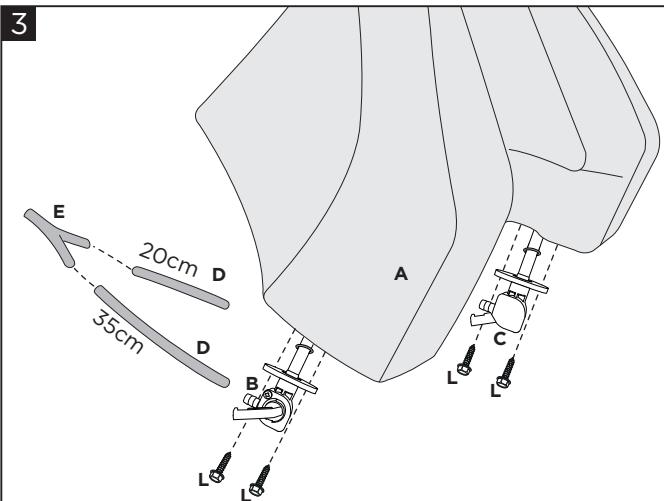

Insert the taps (B) and (C) into the Acerbis fuel tank (A) using the screws (L). Rest the tank on the frame and connect the taps to carburetor through the fitting (E) and the rubber tube (D), cut in the measurements indicated in the figure.
Inserire i rubinetti (B) e (C) nel serbatoio Acerbis (A) tramite le viti (L). Appoggiare il serbatoio sul telaio e collegare i rubinetti al carburatore tramite il raccordo (E) ed il tubo di gomma (D), tagliato nelle misure indicate in figura.

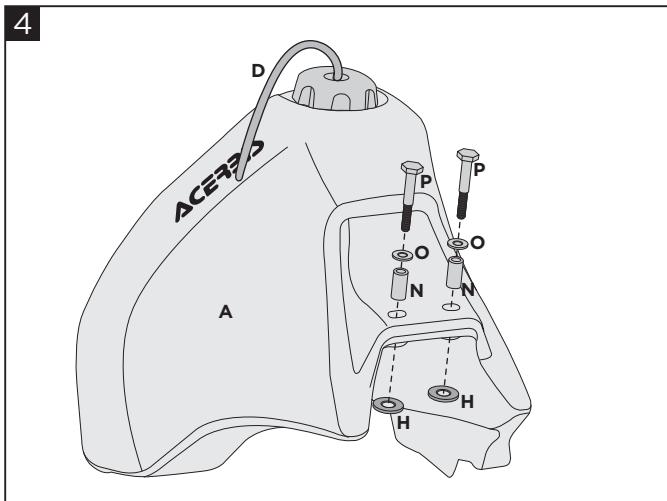

Fix the Acerbis fuel tank (A) to the frame using the screws (P), the washers (O), the spacers (N) and the gaskets (H). Screw the cap with the rubber tube (D). Remount the seat and the original side panels.

Fissare il serbatoio Acerbis (A) al telaio tramite le viti (P), le rondelle (O), gli spessori (N) e le guarnizioni (H). Avvitare il tappo con il tubo in gomma (D). Rimontare la sella e i fianchetti originali.

DISCLAIMER

Due to uncontrolled variables in the manufacturing process of rotational molded fuel tanks, the fuel tank may vary in size and shape by up to 7% of the manufacturer's original listed capacity.

LIBERATORIA

A causa di variabili inponderabili nel processo di stampaggio rotazionale dei serbatoi, questi possono differire in forma e dimensioni fino al 7% rispetto alla capacità dichiarata.

FOR COMPETITION USE ONLY - SOLO PER USO MOTOCICLISTICO

WARNING!

It is EXTREMELY IMPORTANT that the fuel tank is properly installed. To ensure proper installation, it is STRONGLY RECOMMENDED that the tank is installed only by a qualified OEM licensed dealership mechanic. Improper installation could result in serious injuries or death.

If self-installed NOTE THE FOLLOWING: particular attention must be paid to excessive fuel line length and fuel line proximity to hot engine areas and pipes to prevent fire.

Clean tank interior thoroughly before installation. Install this fuel tank only in a well ventilated area, as gasoline fumes are extremely dangerous.

Do not start or operate the vehicle if there are any fuel leaks! Read all instructions first before beginning installation.

Acerbis recommends that installation must be done by a licensed mechanic and that only Acerbis' original parts are used during installation.

Acerbis makes no guarantees or representations, express or implied, regarding the fitment of its product for any particular purpose. Acerbis makes no guarantees or representations, express or implied, regarding the extent to which its products protect individuals or property from injury or death or damage.

EUROPE

ACERBIS ITALIA S.P.A.
VIA SERIO, 37
24021 ALBINO (BG)
ITALY

U.S.A.

ACERBIS U.S.A. INC.
MAIL P.O. BOX 2030
SUN VALLEY, ID 83353
SHIP 110 LINDAY CIRCLE
KETCHUM, ID 83340
U.S.A.

UNITED KINGDOM

ACERBIS U.K LTD
UNIT 4 DUNFERMLINE COURT,
KINGSTON, MILTON KEYNES
MK10 0BY
GREAT BRITAIN